

PRESSUREHOSE

3P

150 PSI

Polyester

Single Jacket



Rugged, Lightweight, Strong and Flexible – Designed for Exterior and Interior Fire Protection

National 3P is an economical single jacket industrial hose made from high strength polyester along with an EPDM rubber liner. A tighter weave improves the operating pressure to 135 psi (930 kPa). 3P packs tightly and is very lightweight. For the same style hose in higher pressure applications look to 5P or 6P hose types.





NATIONAL
FIRE HOSE

3P

POLYESTER SINGLE JACKET LOW PRESSURE

TYPE	SIZE	SERVICE TEST	PROOF TEST	BURST	WEIGHT (50' Coupled)	BOWL SIZE	CERTIFICATION AVAILABLE
	IN	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN	
3P	1½"	150 (1035)	300 (2070)	450 (3100)	8 (3.6)	1¾"	UL, ULC
	2"	150 (1035)	300 (2070)	450 (3100)	13 (5.9)	2⅝"	
	2½"	150 (1035)	300 (2070)	450 (3100)	17 (7.7)	2⅞"	UL, ULC

Operating Pressure not to Exceed 90% of Service Test Pressure.

How to Order

TYPE	HOSE X I.D.	HOSE LENGTH	COLOR (Dura-Cote)	COUPLING SIZE	THREAD TYPE	COUPLING MATERIAL	OPTIONS
3P	15 = 1½"	50 = 50'	W = White (Uncoated)	15 = 1½"	N = NH I = IPT	Blank = Aluminum BR = Brass Rocker Lug BP = Brass Pin Lug	UL = UL Listed ULC = UL Canada Listed
	20 = 2"	100 = 100'		20 = 2"			
	25 = 2½"			25 = 2½"			



LISTED

Part No. Example: 3P20X50W15NBR =

3P Hose, 2" ID by 50' Length, White, 1½" Brass Rocker Lug NH/NST Threaded Coupling

Construction

Polyester Single Jacket EPDM Rubber Inner Liner

Coating

Optional Dura-Cote™

Temperature Range

-40° to 150°F (-40° to 65°C)

Couplings


Aluminum or Brass NH/NST, IPT Threaded

Approvals

1½" and 2½" sizes are UL, ULC approved

Colors

UNCOATED

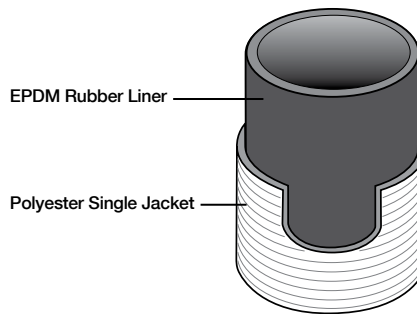

ALL-AMERICAN HOSE™

217 Titusville Road, Union City, PA 16438

www.all-americanhose.com

814.438.7616