

PRESSUREHOSE

5P



250 PSI

Polyester

Single Jacket



Super Strong, Flexible and Ideally Suited for All Exterior and Interior Fire Fighting Applications

National 5P hose is the perfect medium pressure hose that is tough enough to meet most application requirements while remaining economical for most budgets. 5P is a polyester single jacket style hose with an EPDM rubber liner that can handle most fluids including some chemicals and petroleum based products. It has a maximum operating pressure of 225 psi (1550 kPa) and can be treated with our optional Dura-Cote™ treatment for a higher level of abrasion resistance while preventing water pick-up.



ALL-AMERICAN HOSE™



NATIONAL FIRE HOSE

5P

POLYESTER SINGLE JACKET MEDIUM PRESSURE

TYPE	SIZE	SERVICE TEST	PROOF TEST	BURST	WEIGHT (50' Coupled)	BOWL SIZE	CERTIFICATION AVAILABLE
	IN	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN	
5P	1½"	250 (1725)	500 (3450)	750 (5170)	8 (3.6)	1¾"	UL, ULC, FM
	2"	250 (1725)	500 (3450)	750 (5170)	14 (6.4)	2½"	
	2½"	250 (1725)	500 (3450)	750 (5170)	18 (8.2)	2¾"	UL, ULC, FM
	3"	250 (1725)	500 (3450)	750 (5170)	24 (10.9)	3¾"	
	4"	250 (1725)	500 (3450)	750 (5170)	46 (20.9)	4¾"	

Operating Pressure not to Exceed 90% of Service Test Pressure.

How to Order

TYPE	HOSE I.D. X HOSE LENGTH	COLOR (Dura-Cote)	COUPLING SIZE	THREAD TYPE	COUPLING MATERIAL	OPTIONS
5P	15 = 1½" x 50 = 50'	Y = Yellow R = Red W = White (Uncoated) <i>4" only available in W = White Uncoated</i>	15 = 1½"	N = NH I = IPT	Blank = Aluminum BR = Brass Rocker Lug BP = Brass Pin Lug BS = Shank Coupling (1½", 2 and 2½" only)	UL = UL Listed ULC = UL Canada Listed FM = Factory Mutual CR = Neoprene Liner (1½", 2, 2½" and 4" only)
	20 = 2" x 100 = 100'		20 = 2"			
	25 = 2½"		25 = 2½"			
	30 = 3"		30 = 3"			
	40 = 4"		40 = 4"			



Part No. Example: 5P20X50W15NBR =

5P Hose, 2" ID by 50' Length, White, 1½" Brass Rocker Lug NH/NST Threaded Coupling

Construction

Polyester Single Jacket EPDM Rubber Inner Liner

Coating

Optional Dura-Cote™

Temperature Range

-40° to 150°F (-40° to 65°C)


Couplings

Aluminum or Brass NH/NST, IPT Threaded

Approvals

1½" and 2½" sizes are UL, ULC and FM approved

Colors

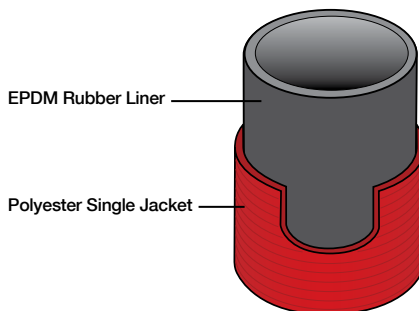

ALL-AMERICAN HOSE™

217 Titusville Road, Union City, PA 16438
www.all-americanhose.com
814.438.7616