



# 8F/7F (187 Forestry Hose)

## POLYESTER SINGLE JACKET FORESTRY HOSE

Our Type 187 forestry hose is a lightweight, all-synthetic fire hose with a polyurethane lining inside a polyester jacket designed to meet the USDA Forest Service Specification 5100-187 for "Synthetic Lined" fire hose. Available in two styles - 7F and 8F. Style 7F is ideal for traditional Type 1 specifications while 8F meets the new Type II specification and is protected from mildew and no drying is required. Type 187 8F is also available with our exclusive Dura-Cote™ treatment, greatly increasing abrasion, heat and flame resistance while virtually eliminating water pickup.

Both hose styles are available in 50' or 100' feet lengths and include your choice of aluminum rocker lug or ¼ turn forestry couplings. Type 187 forestry hose meets or exceeds the low weight requirements of each specification.

### HOSE SIZING AND SPECIFICATIONS


SIZE	SERVICE TEST	PROOF TEST	BURST	WEIGHT (FOR 50' COUPLED)	BOWL SIZE
IN	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN
1"	300 (2070)	600 (4140)	900 (6200)	5 (2.3)	1 5/32"
1 1/2"	300 (2070)	600 (4140)	900 (6200)	7 (3.2)	1 3/4"

As per NFPA 1961 - The service test pressure is to be 10% greater than the "normal highest operating pressure" at which the hose is expected to be used.

### HOW TO ORDER

TYPE	HOSE ID	BY	HOSE LENGTH	COLOR	COUPLING SIZE	THREAD TYPE	COUPLING MATERIAL
8F	10 = 1" 15 = 1 1/2"	X	50 = 50' 100 = 100'	Y = Yellow WM = White (mildew treated)  W = White (uncoated)	10 = 1" 15 = 1 1/2"	N = NH I = IPT QT = Quarter Turn	Aluminum

**Part No. Example: 8F10X50Y10N** = 8F Forestry Hose, 1" ID by 50' Length, Yellow, 1" NH/NST Aluminum Coupling

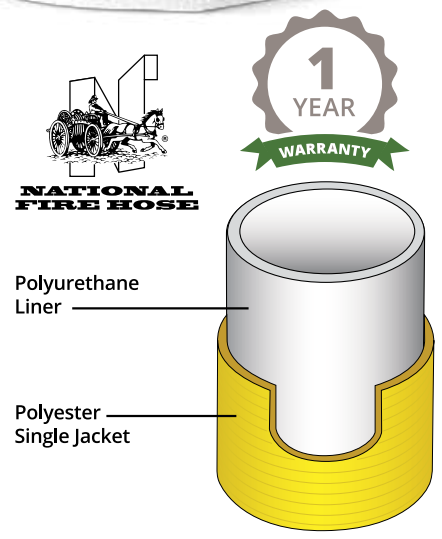

**CONSTRUCTION**  
Polyester Single Jacket  
Polyurethane Inner Liner

**TEMPERATURE RANGE**  
-40°F to 150°F (-40°C to 65°C)

**COUPLINGS**  
Aluminum NH/NST, IPT Threaded or Quarter Turn

**COATING**  
AVAILABLE 8F ONLY:  
Optional Dura-Cote™ (w/color)

**COLORS**

 Yellow (8F)	 White (8F) (mildew treated)	 White (7F) (uncoated)
---	---	---